




# SERIE 1

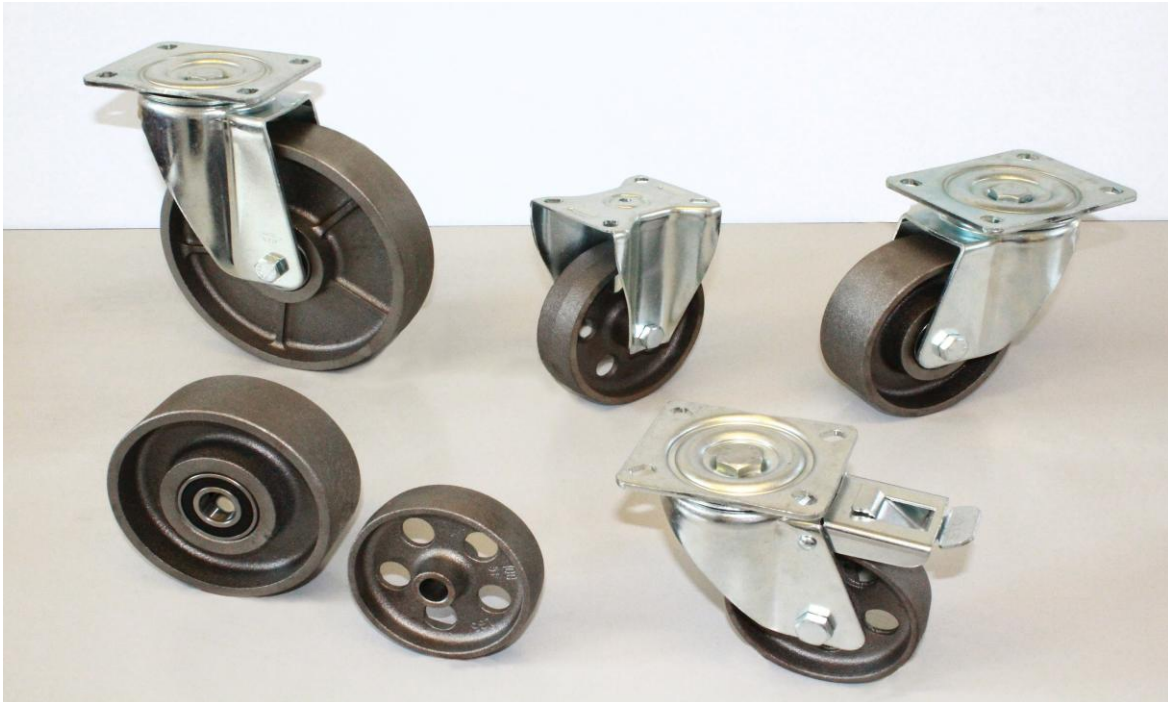

 Ruota realizzata in fusione di ghisa meccanica con cerchio liscio o a 5 fori. Idonea a sopportare temperature da -40° C a + 500° C. Adatta per forti carichi ed impieghi statici su pavimentazioni lisce e compatte, ove l'effetto acustico non è determinante per l'ambiente di lavoro.

MOZZO: K = Cuscinetti a sfera G = Foro Passante

SUPPORTO: Lamiera d'acciaio stampato e zincato, gruppo rotante realizzato con doppia corona di sfere.






 Wheel made of mechanical cast iron with smooth or 5-hole rim. Suitable to withstand temperatures from -40 ° C to + 500 ° C. Suitable for heavy loads and static uses on smooth and compact floors, where the acoustic effect is not decisive for the working environment.

HUB : K = Ball bearing G = Plain bore

BRACKET: Pressed steel, zinc plated. Swivel housing with double balls race ring.






## RUOTA



				M		ART.
80	30	39	15	G	150	R1-G-5F-080
100	30	39	15	G	200	R1-G-5F-100
125	35	49	15	G	240	R1-G-5F-125
150	40	49	20	G	300	R1-G-5F-150
175	50	58	20	G	430	R1-G-5F-175
200	50	58	20	G	480	R1-G-5F-200

# RUOTA



				M		ART.
80	40	45	15	K	350	R1-K-080
105	35	47	15	K	450	R1-K-100
130	40	47	20	K	700	R1-K-130
130	50	50	20	K	1000	R1-K-130-50
150	40	52	20	K	900	R1-K-150
175	50	52	20	K	1200	R1-K-175
200	50	50	20	K	1400	R1-K-200
225	50	65	20	K	1500	R1-K-225
270	70	70	30	K	2400	R1-K-270

## MEDIO - PIASTRA FISSA



						M		ART.
80	30	108	100x84	80x60	9	G	100	453L-1G5F080
100	30	135	100x84	80x60	9	G	150	453L-1G5F100
125	35	162	100x84	80x60	9	G	200	453L-1G5F125
150	40	186	100x84	80x60	9	G	300	453L-1G5F150
175	50	230	132X110	105x80	12	G	400	453P-1G5F175
200	50	242	132X110	105x80	12	G	450	453P-1G5F200

## MEDIO - PIASTRA GIREVOLE



							M		ART.	CON FRENO ART.	
80	30	108	100x84	80x60	9	47	G	113	100	454L-1G5F080	454LF-1G5F080
100	30	135	100x84	80x60	9	47	G	114	150	454L-1G5F100	454LF-1G5F100
125	35	162	100x84	80x60	9	51	G	128	200	454L-1G5F125	454LF-1G5F125
150	40	186	100x84	80x60	9	46	G	128	300	454L-1G5F150	454LF-1G5F150
175	50	230	132X110	105x80	12	59	G	158	400	454P-1G5F175	454PF-1G5F175
200	50	242	132X110	105x80	12	59	G	158	450	454P-1G5F200	454PF-1G5F200

## PESANTE - PIASTRA FISSA



						M		ART.
80	40	108	100X84	80X60	9	K	300	453L-1K080-40
105	35	137	100X84	80X60	9	K	400	453L-1K105-35
130	40	167	134x114	105X80	12	K	600	453P-1K130-40
130	50	170	134x114	105x80	12	K	1000	453PP-1K130-50
150	40	195	134x114	105x80	12	K	900	453PP-1K150-40
175	50	230	134x114	105x80	12	K	1000	453PP-1K175-50
200	50	242	134x114	100x80	12	K	1000	453PP-1K200-50
225	50	295	195x160	160x120	15	K	1500	453I-1K225-50
270	70	333	195x160	160x120	15	K	1800	453I-1K270-70

## PESANTE - PIASTRA GIREVOLE



							M		ART.	CON FRENO ART.	
80	40	108	100X84	80X60	9	47	K	113	300	454L-1K080-40	454LF-1K080-40
105	35	137	100X84	80X60	9	47	K	114	400	454L-1K105-35	454LF-1K105-35
130	40	167	134x114	105X80	12	62	K	158	600	454P-1K130-40	454PF-1K130-40
130	50	170	134x114	105x80	12	62	K	158	1000	454PP-1K130-50	454PPF-1K130-50
150	40	198	134x114	105x80	12	62	K	158	900	454PP-1K150-40	454PPF-1K150-40
175	50	232	134x114	105x80	12	61	K	158	1000	454PP-1K175-50	454PPF-1K175-50
200	50	245	134x114	105x80	12	61	K	158	1000	454PP-1K200-50	454PPF-1K200-50
225	50	295	195x160	160x120	15	63	K	1500	454I-1K225-50	454IF-1K225-50	
270	70	333	195x160	160x120	15	70	K	1800	454I-1K270-70	454IF-1K270-70	