




SERIE 18

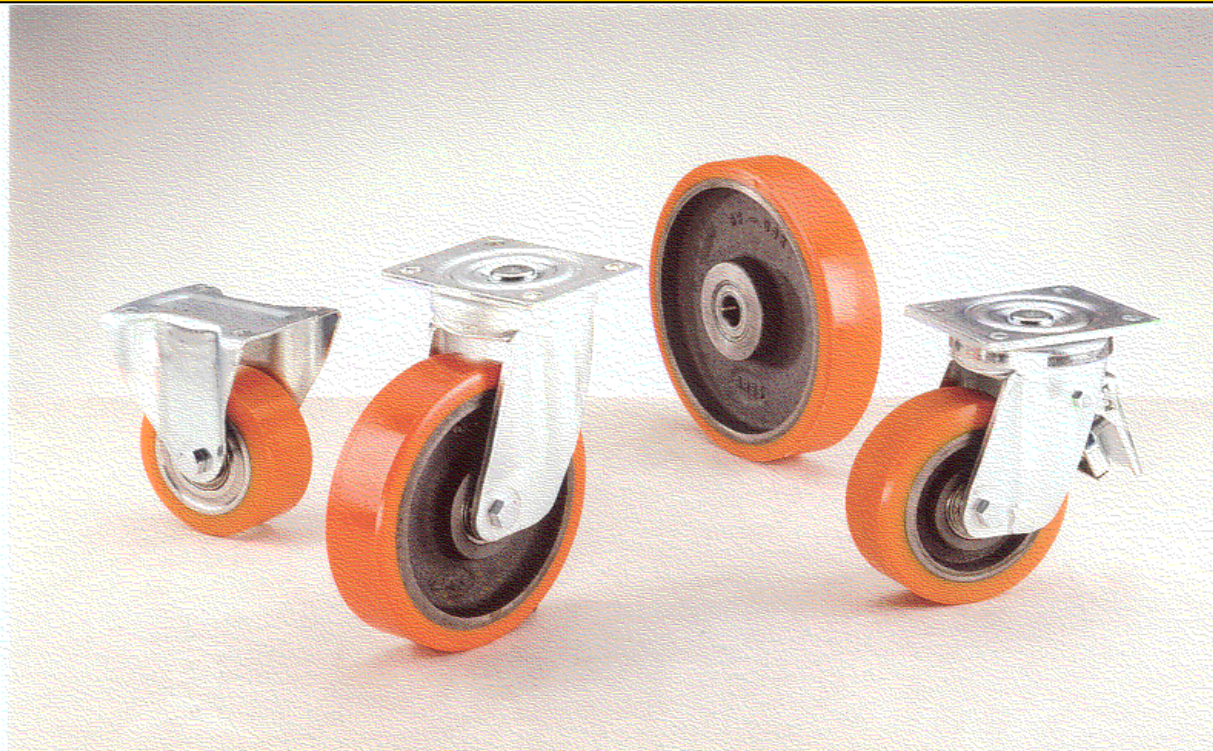

 Ruota con nucleo centrale in ghisa meccanica con rivestimento in poliuretano colato 92 ± 2 Shore A. La particolare mescola consente di ottenere temperature d'impiego da -30° C a +80° C. La ruota è adatta a sopportare carichi elevati, garantendo una notevole scorrevolezza e una completa protezione dei pavimenti, anche nei momenti di massimo carico. La resistenza del poliuretano ai grassi ed ai vari oli (vegetali, animali, ecc.) è molto buona ed anche per altri prodotti chimici. Anche dopo diversi anni, la ruota conserva quasi inalterate le caratteristiche fisiche del poliuretano.

MOZZO: G = Foro liscio K = cuscinetti a sfera






SUPPORTO: Lamiera d'acciaio stampato e zincato, gruppo rotante realizzato con doppia corona di sfere.

 Wheel with iron die-casting centre and coating Polyuretane 92 + 2 Shore A casted. It is able to resist to temperatures from -30°C to +80°C. This wheel can support heavy loads and it has very good flowability and ensures flooring protection, also in the moment with maximum load. The polyurethane's resistance to greases and oils (both mineral and vegetables) is very high, also for chemical products. After many years, the wheel preserves the polyurethane physical properties.

HUB : G = smooth hole K = ball bearing






BRACKET: Pressed steel, zinc plated. Swivel housing with double balls race ring.

RUOTA CON CUSCINETTI

				M		ART.	ART. senza cuscinetti
80	40	40	20	K	350	R19-K-80-040	R19-80-040
100	40	47	15	K	350	R18-K-100-40-15	R18-100-40-S.35X11
100	40	45	20	K	350	R18-K-100-40-20	R18-100-40-S.42X12
100	60	60	20	K	700	R19-K-100-60	R19-100-60
125	50	50	25	K	600	R18-K-125-50	R18-125-50
150	50	50	25	K	700	R18-K-150-50	R18-150-50
180	50	50	25	K	900	R18-K-180-50	R18-180-50
200	40	45	25	K	750	R18-K-200-40	R18-200-40
200	50	52	25	K	1000	R18-K-200-50	R18-200-50
200	80	80	30	K	1500	R18-K-200-80	R18-200-80
250	50	60	25	K	1200	R18-K-250-50	R18-250-50
250	60	60	25	K	1500	R18-K-250-60	R18-250-60
250	80	80	30	K	1800	R18-K-250-80	R18-250-80

300	70	70	30	K	2100	R18-K-300-70	R18-300-70
300	80	80	30	K	2200	R18-K-300-80	R18-300-80
300	100	100	40	K	3000	R18-K-300-100	R18-300-100
350	100	100	40	K	3500	R18-K-350-100	R18-350-100
400	80	100	40	K	3300	R18-K-400-80	R18-400-80
400	100	100	40	K	3800	R18-K-400-100	R18-400-100

RUOTA CON FORO LISCIO

				M		ART.
100	30	36	15	G	250	R18-G-100-30-15
125	35	47	15	G	330	R18-G-125-35-15
150	40	47	20	G	500	R18-G-150-40-20
160	40	47	20	G	650	R18-G-160-40-20
175	40	52	20	G	700	R18-G-175-40-20
200	50	52	20	G	1000	R18-G-200-50-20
250	50	65	25	G	1200	R18-G-250-50-30
250	60	65	25	G	1500	R18-G-250-60-25
300	70	70	25	G	2100	R18-G-300-70-25
300	100	100	30	G	3000	R18-G-300-100-30
350	100	100	30	G	3500	R18-G-350-100-30
400	100	100	30	G	3800	R18-G-400-100-30

MEDIO - PIASTRA FISSA



						M		ART.
80	40	108	100x85	80x60	9	K	300	453L-19K80040
100	40	135	100x85	80x60	9	K	350	453L-18K100-40
100	60	152	134x114	105x80	12	K	600	453P-19K100-60
125	50	164	134x114	105x80	12	K	600	453P-18K125
150	50	195	134x114	105x80	12	K	700	453P-18K150
180	50	232	134x114	105x80	12	K	700	453P-18K180
200	50	242	134x114	105x80	12	K	700	453P-18K200

MEDIO - PIASTRA GIREVOLE



							M		ART.	CON FRENO ART.	
80	40	108	100x84	80x60	9	43	K	113	300	454L-19K80040	454LF-19K80040
100	40	135	100x84	80x60	9	47	K	114	450	454L-18K100-40	454LF-18K100-40
100	60	152	132x110	105x80	12	62	K	158	600	454P-19K100-60	454PF-19K100-60
125	50	164	132x110	105x80	12	62	K	158	600	454P-18K125	454PF-18K125
150	50	195	132x110	105x80	12	62	K	158	700	454P-18K150	454PF-18K150
180	50	232	132x110	105x80	12	61	K	158	700	454P-18K180	454PF-18K180
200	50	242	132x110	105x80	12	61	K	158	700	454P-18K200	454PF-18K200

PESANTE - PIASTRA FISSA



						M		ART.
100	60	152	134x114	105x80	12	K	700	453PP-19K100-60
125	50	164	134x114	105x80	12	K	600	453PP-18K125
150	50	195	134x114	105x80	12	K	700	453PP-18K150
180	50	232	134x114	105x80	12	K	900	453PP-18K180
200	50	242	134x114	105x80	12	K	1000	453PP-18K200
250	50	308	195x160	160x120	15	K	1200	453I-18K250-50
250	60	308	195x160	160x120	15	K	1500	453I-18K250-60
300	70	348	195x160	160x120	15	K	1800	453I-18K300-70

PESANTE - PIASTRA GIREVOLE



										ART.	CON FRENO ART.
100	60	155	132x110	105x80	12	62	K	158	700	454PP-19K100-60	454PPF-19K100-60
125	50	167	132x110	105x80	12	62	K	158	600	454PP-18K125	454PPF-18K125
150	50	198	132x110	105x80	12	62	K	158	700	454PP-18K150	454PPF-18K150
180	50	235	132x110	105x80	12	61	K	158	900	454PP-18K180	4544PPF-18K180
200	50	245	132x110	105x80	12	61	K	158	1000	454PP-18K200	454PPF-18K200
250	50	308	200x160	160x120	15	63	K		1200	454I-18K250-50	454IF-18K250-50
250	60	308	200x160	160x120	15	63	K		1500	454I-18K250-60	454IF-18K250-60
300	70	348	200x160	160x120	15	70	K		1800	454I-18K300-70	454IF-18K300-70