


SERIE 26

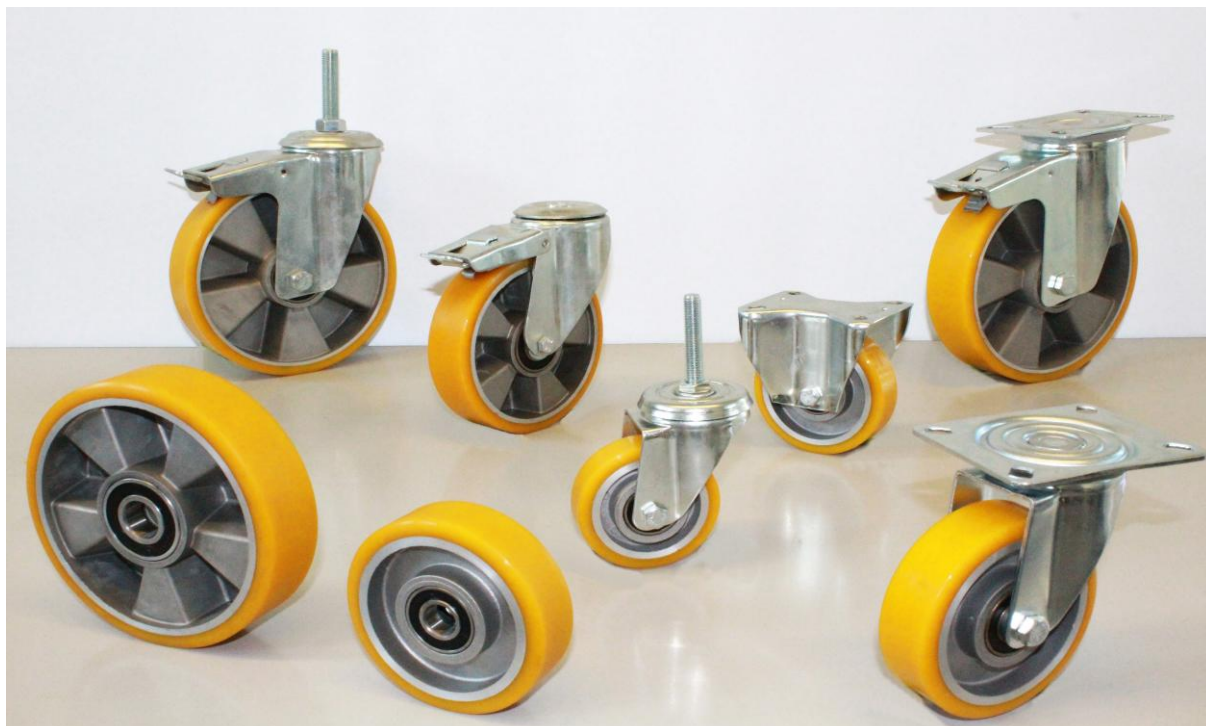

Ruota con nucleo centrale in alluminio pressofuso con rivestimento in poliuretano.

La particolare miscela consente di ottenere temperature d'impiego da -30° C a +80° C e di resistere alla corrosione, all'abrasione ed al contatto con olii e grassi. Garantisce a distanza di anni un'ottima scorrevolezza e una completa protezione dei pavimenti, sopportando carichi gravosi. La durezza del rivestimento in poliuretano è di 92 ± 2 Shore.

MOZZO: K = Cuscinetti a sfera.

SUPPORTO: Lamiera d'acciaio stampato e zincato, gruppo rotante realizzato con doppia corona di sfere.



Wheel with core in aluminium die-casting and coating Polyuretane casted. It is able to resist to temperatures from -30°C to +80°C. This wheel has very good soundless flowability, ensures flooring protection and high resistance to abrasion, tearing, oils and greases action, heavy load capacity.

The hardness is 92 ± 2 Shore.

HUB : K = Ball bearing.

BRACKET: Pressed steel, zinc plated. Swivel housing with double balls race ring.

RUOTA

					M		ART.
60	30	30	12	K	150	R26-K-060	
80	25	30	12	K	150	R26-K-080	
100	30	30	15	K	200	R26-K-100	
100	40	40	20	K	275	R26-K-100-40	
125	30	40	15	K	250	R26-K-125	
125	50	60	20	K	425	R26-K-125-50	
150	40	45	17-20	K	400	R26-K-150	
160	50	60	20	K	500	R26-K-160	
175	50	60	20	K	600	R26-K-175	
200	50	60	20	K	800	R26-K-200	
250	60	60	30	K	1000	R26-K-250	

LEGGERO - PIASTRA FISSA



						M		ART.
60	30	89	100x85	80x60	8	K	120	443-26K060
80	25	108	95x80	80x60	9	K	130	443-26K080
100	30	127	95x80	80x60	9	K	130	443-26K100
125	30	156	95x80	80x60	9	K	130	443-26K125
125	50	164	129x106	105x80	11	K	300	443P-26K125/50
150	40	181	95x80	80x60	9	K	150	443L-26K150
150	40	192	129x106	105x80	11	K	250	443-26K150
160	50	197	129x106	105x80	11	K	250	443-26K160
175	50	228	129x106	105x80	11	K	250	443-26K175
200	50	240	129x106	105x80	11	K	270	443-26K200
250	60	310	187x170	140x105	14	K	700	443-26K250

LEGGERO - PIASTRA GIREVOLE



							M		ART.	CON FRENO ART.	
60	30	89	100x85	80x60	8	37	K	110	120	444-26K060	444F-26K060
80	25	108	95x80	80x60	9	32	K	110	130	444-26K080	444F-26K080
100	30	127	95x80	80x60	9	32	K	110	130	444-26K100	444F-26K100
125	30	156	95x80	80x60	9	32	K	113	130	444-26K125	444F-26K125
125	50	164	129x106	105x80	11	52	K	150	300	444P-26K125/50	444PF-26K125/50
150	40	181	95x80	80x60	9	32	K	130	150	444L-26K150	444LF-26K150
150	40	192	129x106	105x80	11	52	K	150	250	444-26K150	444F-26K150
160	50	197	129x106	105x80	11	52	K	150	250	444-26K160	444F-26K160
175	50	228	129x106	105x80	11	48	K	150	250	444-26K175	444F-26K175
200	50	240	129x106	105x80	11	48	K	150	270	444-26K200	444F-26K200
250	60	310	186x170	140x105	14	80	K	134	700	444-26K250	444F-26K250

LEGGERO - ATTACCO A FORO



					M		ART.	CON FRENO ART.	
60	30	89	12	37	K	110	120	444OB-26K060	444FOB-26K060
80	25	108	12	32	K	110	110	444OB-26K080	444FOB-26K080
100	30	127	12	32	K	110	110	444OB-26K100	444FOB-26K100
125	30	156	12	32	K	113	110	444OB-26K125	444FOB-26K125
125	50	163	12	52	K	150	250	444POB-26K125/50	444PFOB-26K125/50
150	40	178	12	37	K	130	200	444LOB-26K150	444LFOB-26K150
150	40	192	16	52	K	150	200	444OB-26K150	444FOB-26K150
160	50	197	16	52	K	150	200	444OB-26K160	444FOB-26K160
175	50	228	16	48	K	150	250	444OB-26K175	444FOB-26K175
200	50	240	16	48	K	150	250	444OB-26K200	444FOB-26K200

MEDIO - PIASTRA FISSA



						M		ART.
80	25	108	100x84	80x60	9	K	150	453L-26K080
100	30	135	100x84	80x60	9	K	200	453L-26K100
125	30	162	100x84	80x60	9	K	250	453L-26K125
125	50	165	132x110	105x80	12	K	425	453P-26K125/50
150	40	186	100x84	80x60	9	K	300	453L-26K150
150	40	195	132x110	105x80	12	K	400	453P-26K150
160	50	200	132x110	105x80	12	K	500	453P-26K160
175	50	230	132x110	105x80	12	K	600	453P-26K175
200	50	242	132x110	105x80	12	K	700	453P-26K200
250	60	308	200x160	160x120	15	K	1000	453I-26K250

MEDIO - PIASTRA GIREVOLE




							M		ART.	CON FRENO ART.	
80	25	108	100x84	80x60	9	47	K	113	150	454L-26K080	454LF-26K080
100	30	135	100x84	80x60	9	47	K	114	200	454L-26K100	454LF-26K100
125	30	162	100x84	80x60	9	51	K	128	275	454L-26K125	454LF-26K125
125	50	165	132x110	105x80	12	61	K	158	425	454P-26K125/50	454PF-26K125/50
150	40	186	100x84	80x60	9	46	K	128	300	454L-26K150	444LF-26K150
150	40	195	132x110	105x80	12	60	K	157	400	454P-26K150	454PF-26K150
160	50	200	132x110	105x80	12	60	K	158	500	454P-26K160	454PF-26K160
175	50	230	132x110	105x80	12	59	K	158	600	454P-26K175	454PF-26K175
200	50	242	132x110	105x80	12	59	K	158	700	454P-26K200	454PF-26K200
250	60	308	200x160	160x120	15	64	K	158	1000	454I-26K250	454IF-26K250

MEDIO - ATTACCO A FORO



				M		ART.	CON FRENO ART.		
80	25	108	12	43	K	113	150	454LOB-26K080	454LFOB-26K080
100	30	130	12	42	K	114	150	454LOB-26K100	454LFOB-26K100
125	30	156	12	53	K	128	200	454LOB-26K125	454LFOB-26K125
125	50	162	12	61	K	158	250	454POB-26K125/50	454PFOB-26K125/50
150	40	198	12	62	K	158	300	454POB-26K150	454PFOB-26K150
160	50	197	12	62	K	158	300	454POB-26K160	454PFOB-26K160
175	50	228	12	61	K	158	350	454POB-26K175	454PFOB-26K175
200	50	240	12	61	K	158	350	454POB-26K200	454PFOB-26K200

PESANTE - PIASTRA FISSA



						M		ART.
125	50	179	140X110	105x80	12	K	400	453-26K125/50
150	40	207	140X110	105X80	12	K	400	453-26K150
160	50	212	140X110	105x80	12	K	500	453-26K160
175	50	240	140X110	105x80	12	K	600	453-26K175
200	50	253	140X110	105x80	12	K	800	453-26K200
250	60	308	200X160	160X120	15	K	1000	453I-26K250

PESANTE - PIASTRA GIREVOLE



							M			ART.	CON FRENO ART.
125	50	179	140X110	105x80	12	46	K	125	400	454-26K125/50	454F-26K125/50
150	40	207	140X110	105X80	12	52	K	125	400	454-26K150	454F-26K150
160	50	212	140X110	105x80	12	52	K	125	500	454-26K160	454F-26K160
175	50	240	140X110	105x80	12	58	K	125	600	454-26K175	454F-26K175
200	50	253	140X110	105x80	12	58	K	125	800	454-26K200	454F-26K200
250	60	308	200X160	160X120	15	64	K	125	1000	454I-26K250	454IF-26K250